





Material: Messing vernickelt
 max. Betriebsdruck: 18 bar
 max. Betriebstemperatur: 200 °C
 verwendbare Schläuche: PA, PE, PU

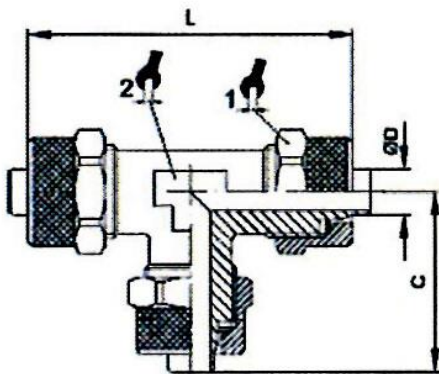

14.800-8-E

T-Verbinder

| Typen Nr. | Artikel Nr. | ØD | C | L |  1 |  2 |  3 | O-Ring |
|-------------|-------------|-------|------|------|---|---|---|--------|
| 14.800-6-E | 115419 | 6/4 | 22,5 | 45,0 | 12 | 8 | 12 | ohne |
| 14.800-8-E | 115420 | 8/6 | 22,5 | 45,0 | 14 | 10 | 14 | ohne |
| 14.800-10-E | 115417 | 10/8 | 25,5 | 51,0 | 16 | 11 | 16 | ohne |
| 14.800-12-E | 115418 | 12/10 | 30,0 | 60,0 | 18 | 14 | 18 | ohne |