


## Standardverschraubungen »value line«

- Messing vernickelt -

Für Luft, Wasser, Dampf, Öl etc.

max. Betriebsdruck: 60,0 bar  
 max. Betriebstemperatur: 150 °C

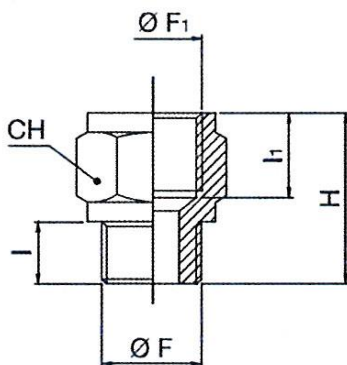

230.08-N-E

**Verlängerungsstück, kurz, zylindrisch**

Artikel Nr.	Ident Nr.	F	F1	I	I1	H	CH
230.01-N-E	115510	M5	G 1/8	4,0	8,0	14,5	14
230.02-N-E	115511	G 1/8	G 1/8	6,0	8,0	16,0	14
230.03-N-E	115512	G 1/8	G 1/4	6,0	11,0	19,5	17
230.04-N-E	115513	G 1/4	G 1/4	8,0	11,0	21,5	17
230.05-N-E	115514	G 1/4	G 3/8	8,0	11,5	22,5	22
230.06-N-E	115515	G 3/8	G 3/8	9,0	11,5	23,5	22
230.07-N-E	115516	G 3/8	G 1/2	9,0	14,0	27,0	24
230.08-N-E	115517	G 1/2	G 1/2	10,0	14,0	28,0	26